




- Spread consistent amount of material despite changing truck speeds with automatic rate control on the advanced controller.
- Achieve desired output with patented dosage gate that accurately meters granular material.
- Create the optimal pre-wet ratio with a 26 gallon per minute pump that can output 65 gallons per cubic yard of salt.
- Thoroughly mix pre-wet liquid and granular material on the concave mixing disc with fluted hub.

Highlights

- Designed to fit trucks classes 6+ (20,000+ lbs GVW)
- Sensored hydraulic motors allow for accurate material output and spread patterns
- Dual augers improve output while preventing material bridging
- Corrosion and clog resistant poly chute for longer life and better performance
- CAN-bus controller is easy to operate allowing the driver to select 1 to 3 lanes of coverage with 6 different combinations with the touch of a button

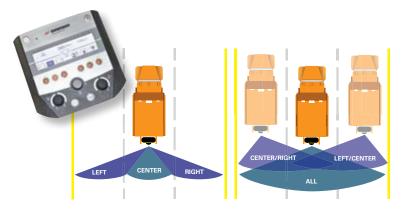

Specifications

Size	10, 12, or 14 ft. lengths
Size	10, 12, or 14 it. lengths
Capacity	6.7, 8.1, or 11.2 cu yds.
Drive	Hydraulic
Conveyor	Chain or dual auger
Cab - Axle Length	10' 84" CA 12' 108" CT 14' 120" CT
Weight Empty	Chain: 3,840, 4,300, or 4,840 lbs. Dual Auger: 4,010, 4,470, or 5,150 lbs.
Construction	12 gauge stainless steel
Spread Width	3 lanes with 6 different lane combinations
Safety Features	Auger safety interlock, spinner interlock
Warranty	1 year, 10 years on the poly idler
Accessories	Ladder, work lights, cab shields, tarp kit, vibrator

